

CUTTERMASTER

PROFESSIONAL®

Tool Room Series


"Quality Sharpening Since 1972"

GS-26 End Mill Sharpener

- 10 mm to 26 mm (.375 to 1.0 Inch)
- 2, 3 and 4 Flute Center Cutting Geometry
- 0 to 5 Degree End Center Clearance
- Carbide or HSS End Mills
- Chuck it Once System (Average End regrinding time under two minutes)
- High Efficiency High Torque DC Motor
- Long Life Diamond or CBN Wheels (300- 400 estimated Grinds)
- Precision ER Collets and Chucks
- Flute to Flute End Variation .0003 Inch
- Steel Cabinet with Built in Power Distribution and Dust Collection system
- Precision Machined and Ground All metal Construction
- CSA / UL Approved



"Designed to be used on the shop floor"

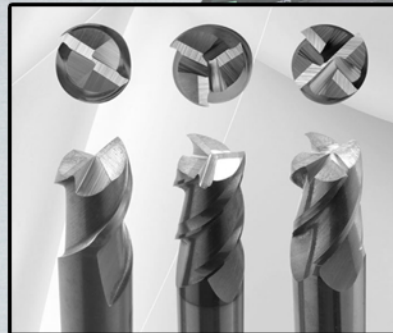

| | |
|--|---|
| Model | GS-26 |
| End Mill Diameter | φ 10mm - φ 26mm |
| Power Supply | AC110V 50/60Hz AC220V (Opt.) |
| R.P.M of Motor | 4600 R.P.M |
| Grinding Wheel | Standard: SD#200 For Carbide Option: CBD#200 for HSS |
| Weight of Machine | 28 Kg |
| Weight of Auxiliary | 44 Kgs |
| Machine Packing Size | L:510mm W:290mm H:270mm |
| Desk Packing Size | L:710mm W:400mm H:860mm |
| Standard Accessories | Collets X 16 pcs |
| | Holder Chuck Set / 4 pcs |
| | Bushing / 5 pcs |
| | Hexagon Wrench 3mm x 1 pcs / 5mm x 1 pcs |
| Equipment: Metal Desk and Dust Collector | |